

### 1. 使用環境條件

Apply Environmental Condition :

No.	Item	Specification
1-1	保存溫度 Storage Temperature Range	-20℃～60℃
1-2	操作溫度 Operating Temperature Range	-10℃～50℃
1-3	操作電壓 Operating Voltage Range	4. 5V～5.5V

### 2. 測試環境

Standard Test Environment :

2-1	測試環境 Standard Test Environment	Every characteristic of the inspect must be normal temperature and humidity carry out the test , temperature 25±5℃ and relative humidity 65±10% of judgment made in accordance with this specification standard testing conditions.
-----	-----------------------------------	---

### 3. 外觀檢查

Appearance Inspection :

No.	Item	Specification
3-1	外觀尺寸 Outline Drawing	Dimension see the attachment
3-2	外觀 Appearance	No damage which affects functions allowed



Product Name

**Large Retract Landing Gear**

Model No.

**PZ-15091**

Version

**V1**

Page

**1/**

#### 4. 電 氣 特 性

Electrical Specification (Function of the Performance) :

No.	Item	4.8V	6V	4.8V
4-1	空載轉速 Operating speed (at no load)	0.8sec/60°	0.6s/60°	
4-2	空載電流 Running current (at no load)	150±50mA	150±50mA	
4-3	停止扭力 Stall torque (at locked)	3.5 kg-cm	3.5 kg-cm	
4-4	停止電流 Stall current (at locked)	1±0.05A	1±0.05A	
4-5	待機電流 Idle current (at stopped)	4 ±1 mA	4 ±1 mA	

Note: Item 4-2 definition is average value when the servo running with no load

#### 5. 機 械 特 性

Mechanical Specification :

No.	Item	Specification
5-1	外觀尺寸 Overall Dimensions	See the drawing
5-2	機構極限角度 Limit angle	90°± 1°
5-3	重量 Weight	54±1 grams (without servo horn)
5-4	導線規格 Connector wire gauge	# 30 PVC
5-5	導線長度 Connector wire length	100 ± 5 mm
5-6	舵片規格 Horn gear spline	
5-7	舵片種類 Horn type	
5-8	減速比 Reduction ratio	1/7.72



Product Name  
**Large Retract Landing Gear**

Model No.  
**PZ-15091**


Version  
**V1**

Page  
**2**

## 6. 控制特性

Control Specification :

No.	Item	Specification
6-1	控制系統 Control system	Pulse width modification
6-2	放大器種類 Amplifier type	MCU controller
6-3	操作角度 Operating travel	90(when 1000→2000 $\mu$ sec)
6-4	中立位置 Neutral position	
6-5	脈波訊號虛位 Dead band width	
6-6	旋轉方向 Rotating direction	Counterclockwise (when 1000→2000 $\mu$ sec)
6-7	脈波寬度範圍 Pulse width range	1000→2000 $\mu$ sec
6-8	可作動角度範圍 Maximum travel	Approx 90°(when 1000→2000 $\mu$ sec)

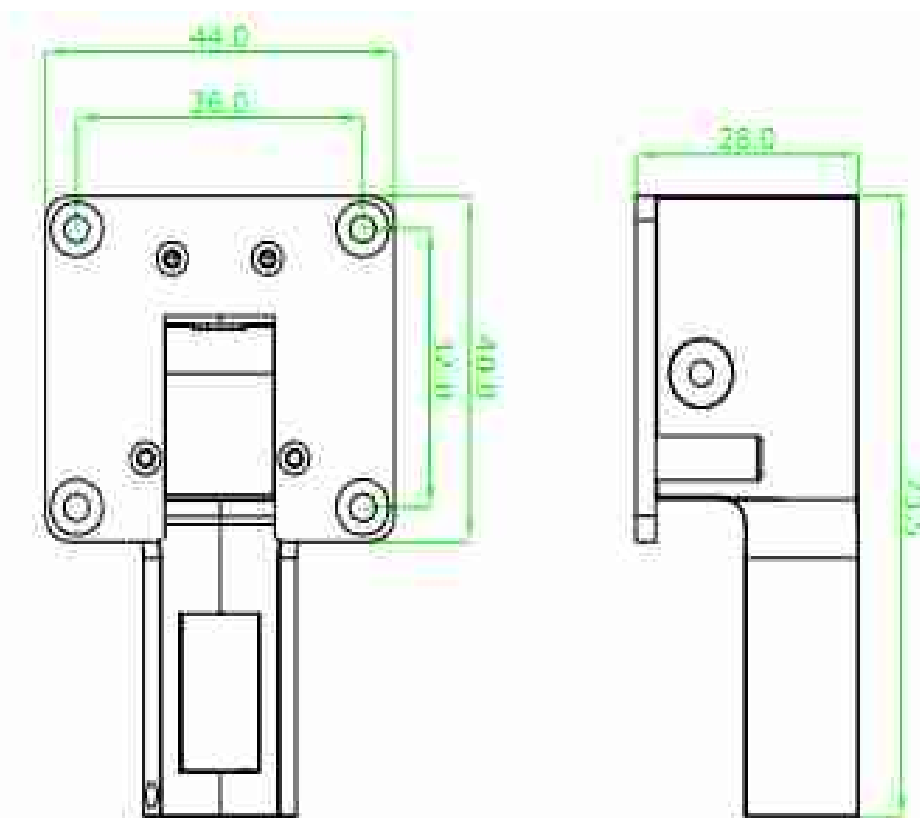

Product Name  
**Large Retract Landing Gear**

Model No.  
**PZ-15091**

Version  
**V1**

Page  
**3/**