

1. 使用環境條件

Apply Environmental Condition :

No.	Item	Specification
1-1	保存溫度 Storage Temperature Range	-20℃～60℃
1-2	操作溫度 Operating Temperature Range	-10℃～50℃
1-3	操作電壓 Operating Voltage Range	4. 8V～6V

2. 測試環境

Standard Test Environment :

2-1	測試環境 Standard Test Environment	Every characteristic of the inspect must be normal temperature and humidity carry out the test , temperature $25\pm 5^{\circ}\text{C}$ and relative humidity $65\pm 10\%$ of judgment made in accordance with this specification standard testing conditions.
-----	-----------------------------------	---

3. 外觀檢查

Appearance Inspection :

No.	Item	Specification
3-1	外觀尺寸 Outline Drawing	Dimension see the attachment
3-2	外觀 Appearance	No damage which affects functions allowed



Product Name

SERVO

Model No.

PZ-15094

Version

V1

Page

1/

4. 電 氣 特 性

Electrical Specification (Function of the Performance) :

No.	Item	4.8V	6V
4-1	空載轉速 Operating speed (at no load)	0.5±0.01s/cm	0.45±0.01s/cm
4-2	空載電流 Running current (at no load)	60±15mA	65±15mA
4-3	停止扭力 Stall torque (at locked)	1.1±0.1Kg·cm	1.4±0.15Kg·cm
4-4	停止電流 Stall current (at locked)	500±20mA	550±20mA
4-5	待機電流 Idle current (at stopped)	3±1mA	3±1mA

Note: Item 4-2 definition is average value when the servo running with no load

5. 機 械 特 性

Mechanical Specification :

No.	Item	Specification
5-1	外觀尺寸 Overall Dimensions	See the drawing
5-2	機構極限角度 Limit angle	90°± 1°
5-3	重量 Weight	18.7±1 grams (without servo horn)
5-4	導線規格 Connector wire gauge	# 30 PVC
5-5	導線長度 Connector wire length	100 ± 5 mm
5-6	舵片規格 Horn gear spline	
5-7	舵片種類 Horn type	
5-8	減速比 Reduction ratio	1/7.72



Product Name

SERVO

Model No.

PZ-15094

Version

V1




Page

2/

6. 控制特性

Control Specification :

No.	Item	Specification
6-1	控制系統 Control system	Pulse width modification
6-2	放大器種類 Amplifier type	MCU controller
6-3	操作角度 Operating travel	90(when 1000→2000 μ sec)
6-4	中立位置 Neutral position	
6-5	脈波訊號虛位 Dead band width	
6-6	旋轉方向 Rotating direction	Counterclockwise (when 1000→2000 μ sec)
6-7	脈波寬度範圍 Pulse width range	1000→2000 μ sec
6-8	可作動角度範圍 Maximum travel	Approx 90°(when 1000→2000 μ sec)

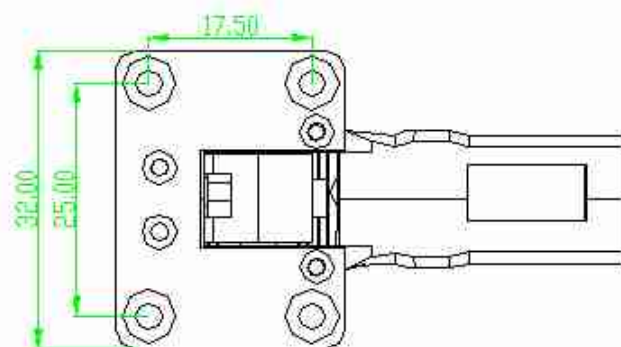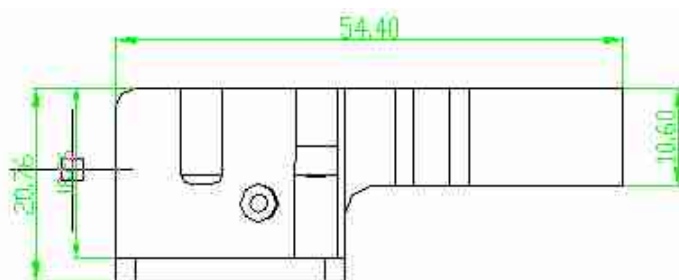

Product Name

SERVO

Model No.

PZ-15094

Version

V1

Page

3