


PRODUCT SPECIFICATION

MODE: TX52W

5.8G 2000mW 8 Channel AV Transmitter Module

	Modulate	Wideband FM Modulate				
	Video Format	NTSC/PAL				
	Characteristics	Value			Units	
		Min.	Typ.	Max.		
1	Output Impedance	---	50	---	Ohm	
2	Output Power		33	33	dBm	
3	Channel Frequency					
	CH1	---	5705	---	MHz	
	CH2	---	5685	---	MHz	
	CH3	---	5665	---	MHz	
	CH4	---	5645	---	MHz	
	CH5	---	5885	---	MHz	
	CH6	---	5905	---	MHz	
	CH7	---	5925	---	MHz	
	CH8	---	5945	---	MHz	
4	Operating Voltage	7.0	12	24	V	
5	Supply current	---	1500	---	mA	
6	Operating Temperature	-10	---	+85	℃	
7	Video Band Width	0	---	8.0	MHz	
8	Audio carrier Frequency	---	6.5	---	MHz	
9	Video Input Level	0.8	1.0	1.2	Vp-p	
10	Video Input Impedance	---	75	---	Ohm	
11	Audio Input Level	0.5	---	2.0	Vp-p	
12	Audio Input Impedance	---	10K	---	Ohm	
13	Weight	---		---	g	
14	Antenna Connector	SMA Connector				
15	Dimensions (L x W x H)	78x42x20 mm				

1.接口说明

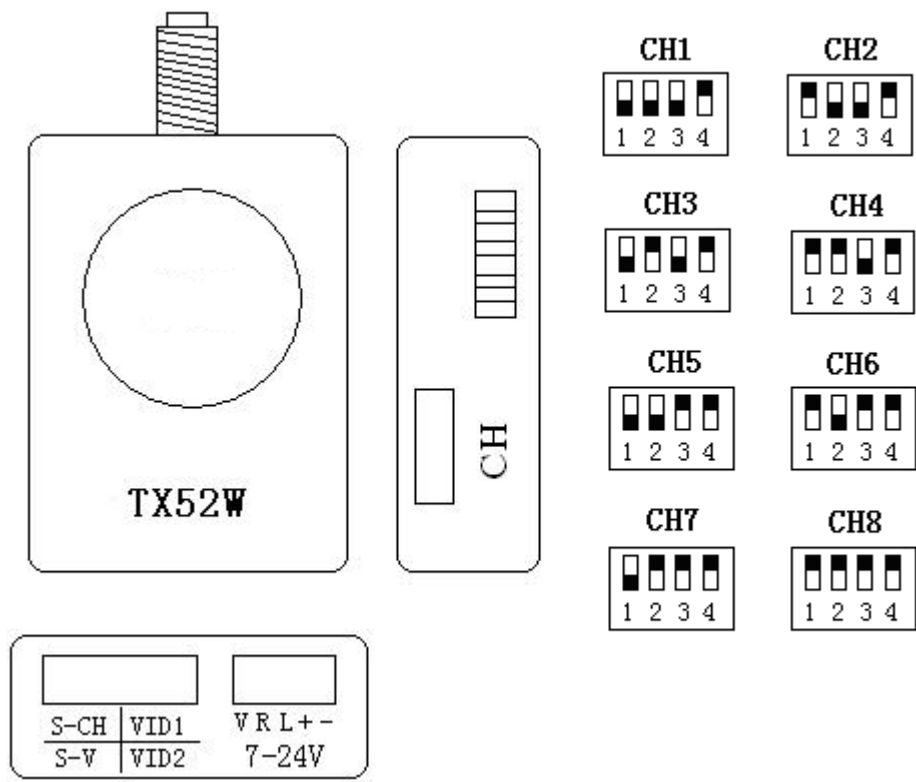

2.功能介绍

- 1.两路视频输入，遥控器控制选择两路视频切换
- 2.遥控器控制频道切换
- 3.如图，S-CH 和 S-V 分别连接遥控发射器，S-CH 为遥控器频道控制（S-CH 连接时，CH 开关无效），S-V 为遥控器控制两路视频切换
- 4.如图，VID1 VID2 连接两路视频，由遥控器控制切换
- 5.如图，“V”为视频输入（不使用遥控器操作时，请连接此处），“R、L”为音频输入，“+”为电源正极（7-24V），“-”为电源负极